Flex Polyform 450mm x 5m brown


Article number: 8021720220

MAGE
Damit Macher machen können.

Product overview

MAGE Flex Polyform is a highly flexible wall and chimney connection roll made from a high-quality PIB composite. This combination of PIB (polyisobutylene) and expanded aluminum mesh enables optimal, highly tear-resistant molding to the roofing. The entire back is coated with adhesive butyl and covered with a two-part, overlapping protective film, which allows the product to be applied step by step. MAGE Flex Polyform offers lasting protection in all weather conditions and remains dimensionally stable even when stretched by 40% lengthwise and 20% crosswise.

- Visually appealing surface structure
- Optimal moldability to the roofing
- QNG certified
- Weather, long-term, and corrosion resistant

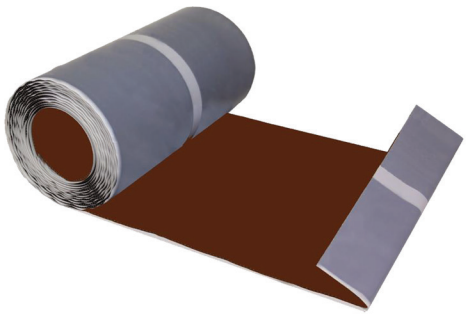



Technical specifications

Specifications	
Technical	
Colour	Brown
Colour indication	RAL 8019
Material	Polyisobutylene (PIB)
Performance	
Temperature resistance (min.)	-40 °C
Temperature resistance (max.)	90 °C
Can be glued	☑

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-24-09-2026-INT-EN

MAGE Roof & Building Components GmbH
An den Steinenden 7 • 04916 Herzberg (Elster) • Tel.: +49 3535 4007-0 • Fax: +49 3535 4007-32
info@mage-roof.com • www.mage-roof.com

Flex Polyform 450mm x 5m brown

Article number: 8021720220

MAGE
Damit Macher machen können.

Technical specifications (continuation)

Performance	
Reinforcement	☑
Self adhesive	☑
Stretch length	40 %
Stretch width	20 %
Dimensions	
Length gross	5 m
Length gross	5,000 mm
Width	450 mm
Height	460 mm
Thickness	2.4 mm
Net weight	7.95 kg

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-24-09-2026-INT-EN

MAGE Roof & Building Components GmbH
An den Steinenden 7 • 04916 Herzberg (Elster) • Tel.: +49 3535 4007-0 • Fax: +49 3535 4007-32
info@mage-roof.com • www.mage-roof.com