AirTex FacaTop DSK back

Article number: 8032010000

MAGE
Damit Macher machen können.

Product overview

AirTex FacaTop DSK is a highly diffusion-open, two-layer facade membrane with double self-adhesive strip.

- CE certified
- For VHF with metal and/or wood substructures
- Also suitable for façades with decorative joints
(horizontal joints: max. 40 per cent of the surface area, joint width max. 50 mm; vertical joints: max. 30 per cent of the surface area, joint width max. 40 mm)
- Supports the design possibilities of
openwork
facade cladding
- Integrated double self-adhesive strip
- Highly diffusion-open for optimum building protection, also with insulation

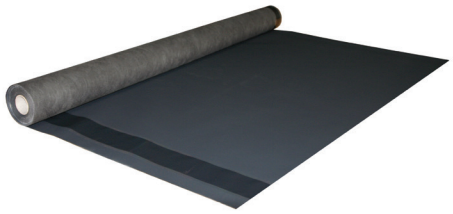

Technical specifications

Specifications	
Technical	
Colour	Black
Material	Acrylic
Adhesive tape included	☑
Grammature	270 g/m²
Number of layers	2
Performance	
Temperature resistance (min.)	-50 °C
Temperature resistance (max.)	100 °C
Reaction to fire: Euro class	B - s1 d0
Nail tear strength diagonal	140 N
Nail tear strength length	130 N
Reinforcement	☒
SD value	0.02 M
Stretch length	30 %
Stretch after aging length	28 %
Stretch width	35 %
Stretch after aging width	33 %
Tensile strength diagonal	200 N
Tensile strength length	320 N
Tensile strength diagonal after aging	190 N
Tensile strength length after aging	310 N

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-22-09-2026-INT-EN

MAGE Roof & Building Components GmbH
An den Steinenden 7 • 04916 Herzberg (Elster) • Tel.: +49 3535 4007-0 • Fax: +49 3535 4007-32
info@mage-roof.com • www.mage-roof.com

AirTex FacaTop DSK back

Article number: 8032010000

MAGE
Damit Macher machen können.

Technical specifications (continuation)

Performance	
UV resistance	☒
UV resistance period	3 Months
Water tightness class	W1
Dimensions	
Length gross	50 m
Length gross	50,000 mm
Width	1.5 m
Width	1,500 mm
Height	178 mm
Thickness	0.46 mm
Net weight	20.25 kg
M2 per roll	75

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-22-09-2026-INT-EN

MAGE Roof & Building Components GmbH
An den Steinenden 7 • 04916 Herzberg (Elster) • Tel.: +49 3535 4007-0 • Fax: +49 3535 4007-32
info@mage-roof.com • www.mage-roof.com