AirTex Safety ND DSK 1,5 x 34m

Article number: 8031710010

MAGE
Damit Macher machen können.

Product overview

AirTex Safety ND DSK is a diffusion-open underlay and underlay membrane with double self-adhesive strips.

- With integrated nail seal*
- Fall-through protection in accordance with DIN 4426, section 5.2
- Perforation resistance tested by the Fraunhofer Institute
- Suitable for all fully insulated, unformed, and formed pitched roofs
- When installed on formwork, additional fastening zone can be used in the height overlap area of the membrane
- Oil and surfactant resistant
- CE certified

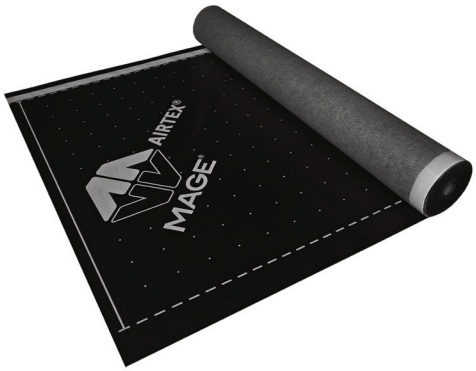

Technical specifications

Specifications	
Technical	
Colour	Black
Material	TPU
Adhesive tape included	☑
Grammature	280 g/m²
Number of layers	3
Performance	
Temperature resistance (min.)	-30 °C
Temperature resistance (max.)	110 °C
Reaction to fire: Euro class	B - s1 d0

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-02-10-2026-INT-EN

MAGE Roof & Building Components GmbH
An den Steinenden 7 • 04916 Herzberg (Elster) • Tel.: +49 3535 4007-0 • Fax: +49 3535 4007-32
info@mage-roof.com • www.mage-roof.com

AirTex Safety ND DSK 1,5 x 34m

Article number: 8031710010

MAGE
Damit Macher machen können.

Technical specifications (continuation)

Performance	
Nail tear strength diagonal	300 N
Nail tear strength length	300 N
Reinforcement	☒
SD value	0.13 M
Stretch length	50 %
Stretch after aging length	45 %
Stretch width	80 %
Stretch after aging width	75 %
Tensile strength diagonal	520 N
Tensile strength length	520 N
Tensile strength diagonal after aging	420 N
Tensile strength length after aging	420 N
UV resistance period	3 Months
Water tightness class	W1
Installation	
UV exposure	12 Weeks
Dimensions	
Length gross	34 m
Length gross	34,000 mm
Width	1.5 m
Width	1,500 mm
Height	173 mm
Thickness	0.6 mm
Net weight	14.28 kg
M2 per roll	51

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-02-10-2026-INT-EN

MAGE Roof & Building Components GmbH
An den Steinenden 7 • 04916 Herzberg (Elster) • Tel.: +49 3535 4007-0 • Fax: +49 3535 4007-32
info@mage-roof.com • www.mage-roof.com