AirTex Real DSK AG

Article number: 8031720000

MAGE
Damit Macher machen können.

Product overview

Airtex Real DSK is a highly diffusion-open, three-layer underlay and roof underlay membrane with a membrane insert and double self-adhesive strip.

- CE certified
- Integrated, double self-adhesive strips
- Very good tear and nail resistance
- Highly diffusion-open
- Wind and driving rain proof
- Easy to install and handle
- High grammage
- High UV stability
- High stability (virtually shrink-free)
- Long weather resistance
- Coordinated system for temporary roofing

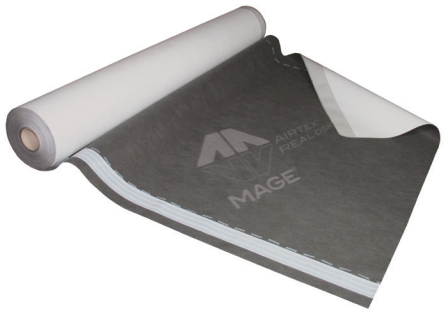

Technical specifications

Specifications	
Technical	
Colour	Anthracite
Material	PP
Adhesive tape included	☑
Grammature	160 g/m²
Number of layers	3
Performance	
Temperature resistance (min.)	-40 °C
Temperature resistance (max.)	80 °C
Reaction to fire: Euro class	E
Nail tear strength diagonal	200 N
Nail tear strength length	190 N
Reinforcement	☒
SD value	0.04 M
Stretch length	65 %
Stretch after aging length	65 %
Stretch width	40 %
Stretch after aging width	40 %
Tensile strength diagonal	260 N
Tensile strength length	310 N
Tensile strength diagonal after aging	185 N
Tensile strength length after aging	220 N

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-22-09-2026-INT-EN

MAGE Roof & Building Components GmbH
An den Steinenden 7 • 04916 Herzberg (Elster) • Tel.: +49 3535 4007-0 • Fax: +49 3535 4007-32
info@mage-roof.com • www.mage-roof.com

AirTex Real DSK AG

Article number: 8031720000

MAGE
Damit Macher machen können.

Technical specifications (continuation)

Performance	
UV resistance	☒
UV resistance period	3 Months
Water tightness class	W1
Dimensions	
Length gross	50 m
Length gross	50,000 mm
Width	1.5 m
Width	1,500 mm
Height	208 mm
Thickness	0.5 mm
Net weight	12 kg
M2 per roll	75

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-22-09-2026-INT-EN