FireSafe Aluflexbond 75mm


Article number: 8041010040

MAGE
Damit Macher machen können.

Product overview

FireSafe Aluflexbond is a reinforced, reflective aluminum adhesive tape for bonding reflective roof and facade membranes. It is suitable for indoor and outdoor use and can be used to seal chimneys, skylights, and built-in components on roofs.

- Very high reflectivity (95%)
- Can be used in wet conditions
- Flexible adhesive tape
- High adhesive strength on many surfaces
- UV-resistant

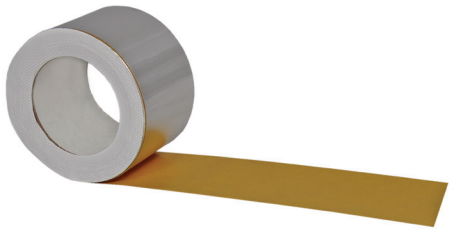

Technical specifications

Specifications	
Technical	
Colour	Silver
Material	Aluminium
Material - layer 1	ALU
Elastic	☒
Number of layers	2
Reinforcement grid	1
Insulated	☒
Double sides	☒
Performance	
Usage	Interior
Adhesive material	Acrylate
Temperature resistance (min.)	-40 °C
Temperature resistance (max.)	90 °C
Limited shelf life	☒
Self adhesive	☑
Tape application	Roof membrane
UV resistance	☑
Dimensions	
Length gross	25 m
Length gross	25,000 mm
Width	75 mm

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-22-09-2026-INT-EN

MAGE Roof & Building Components GmbH
An den Steinenden 7 • 04916 Herzberg (Elster) • Tel.: +49 3535 4007-0 • Fax: +49 3535 4007-32
info@mage-roof.com • www.mage-roof.com

FireSafe Aluflexbond 75mm

Article number: 8041010040

MAGE
Damit Macher machen können.

Technical specifications (continuation)

Dimensions	
Height	75 mm
Thickness	0.19 mm
Net weight	0.625 kg

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-22-09-2026-INT-EN

MAGE Roof & Building Components GmbH
An den Steinenden 7 • 04916 Herzberg (Elster) • Tel.: +49 3535 4007-0 • Fax: +49 3535 4007-32
info@mage-roof.com • www.mage-roof.com