AirTex A2 DSK 50 mm


Article number: 8041010020

MAGE
Damit Macher machen können.

Product overview

Tested system adhesive tape for fire class A2 for windproof bonding of the FireSafe W2 Black facade membrane and the FireSafe W1 Black roof and facade membrane.

- Easy to use
- High adhesive strength
- UV-resistant
- Double-sided adhesive tape for bonding joints and connections

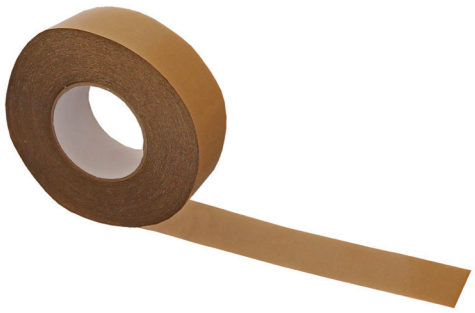

Technical specifications

Specifications	
Technical	
Colour	Natural beige
Material	Polyester
Elastic	☒
Number of layers	2
Insulated	☒
Double sides	☑
Performance	
Usage	Interior
Adhesive material	Acrylate
Temperature resistance (min.)	-30 °C
Temperature resistance (max.)	170 °C
Limited shelf life	☑
Self adhesive	☑
Tape application	Roof membrane
UV resistance	☑
Dimensions	
Length gross	25 m
Length gross	25,000 mm
Width	48 mm
Height	50 mm
Thickness	0.22 mm

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-22-09-2026-INT-EN

MAGE Roof & Building Components GmbH
An den Steinenden 7 • 04916 Herzberg (Elster) • Tel.: +49 3535 4007-0 • Fax: +49 3535 4007-32
info@mage-roof.com • www.mage-roof.com

AirTex A2 DSK 50 mm

Article number: 8041010020

MAGE
Damit Macher machen können.

Technical specifications (continuation)

Dimensions	
Net weight	0.814 kg

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-22-09-2026-INT-EN

MAGE Roof & Building Components GmbH
An den Steinenden 7 • 04916 Herzberg (Elster) • Tel.: +49 3535 4007-0 • Fax: +49 3535 4007-32
info@mage-roof.com • www.mage-roof.com