FireSafe W1 Black


Article number: 8031750030

MAGE
Damit Macher machen können.

Product overview

FireSafe W1 Black is a highly diffusion-open and non-combustible underlay and roof membrane for roofs and facades.

- Non-combustible (A2-s1,d0)
- UV-stable
- Highly diffusion-open sd value 0.06 m
- Easy to work with
- Material guarantee registered with ZVDH and QNG Ready

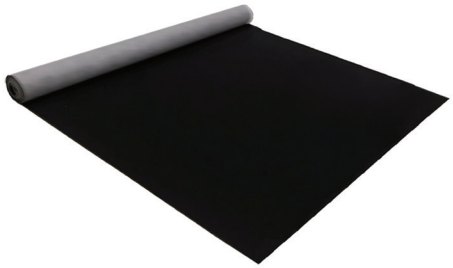

Technical specifications

Specifications	
Technical	
Colour	Black
Material	E-glass fibers
Adhesive tape included	☒
Grammature	220 g/m²
Number of layers	1
Performance	
Temperature resistance (min.)	-36 °C
Temperature resistance (max.)	120 °C
Nail tear strength diagonal	162 N
Nail tear strength length	162 N
Reinforcement	☒
SD value	0.06 M
Stretch length	4 %
Stretch after aging length	4 %
Stretch width	3 %
Stretch after aging width	3 %
Tensile strength diagonal	2157 N
Tensile strength length	2931 N
Tensile strength diagonal after aging	1890 N
Tensile strength length after aging	2160 N
UV resistance	☑

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-22-09-2026-INT-EN

MAGE Roof & Building Components GmbH
An den Steinenden 7 • 04916 Herzberg (Elster) • Tel.: +49 3535 4007-0 • Fax: +49 3535 4007-32
info@mage-roof.com • www.mage-roof.com

FireSafe W1 Black

Article number: 8031750030

MAGE
Damit Macher machen können.

Technical specifications (continuation)

Performance	
UV resistance period	NaN
Water tightness class	W1
Dimensions	
Length gross	50 m
Length gross	50,000 mm
Width	1.4 m
Width	1,400 mm
Height	150 mm
Thickness	0.23 mm
Net weight	17 kg
M2 per roll	70

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-22-09-2026-INT-EN

MAGE Roof & Building Components GmbH
An den Steinenden 7 • 04916 Herzberg (Elster) • Tel.: +49 3535 4007-0 • Fax: +49 3535 4007-32
info@mage-roof.com • www.mage-roof.com