AirTex UV-Tape 230 75 mm


Article number: 8041010010

MAGE
Damit Macher machen können.

Product overview

Black system tape for fire class A2, designed for windproof sealing of joints and connections in the FireSafe W2 Black facade membrane and the FireSafe W1 Black roof and facade membrane.

- Quick and easy installation
- Strong adhesion to a wide range of substrates
- Excellent resistance to moisture and weathering
- Very good mechanical properties
- Suitable for indoor and outdoor use

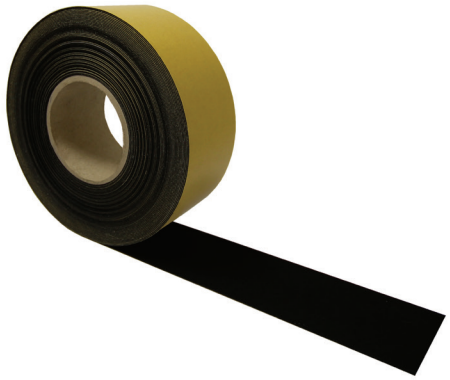

Technical specifications

Specifications	
Technical	
Colour	Black
Insulated	☒
Double sides	☒
Performance	
Usage	Interior
Adhesive material	Acrylate
Temperature resistance (min.)	-40 °C
Temperature resistance (max.)	100 °C
Limited shelf life	☑
Self adhesive	☑
Tape application	Air tight
UV resistance	☑
Dimensions	
Length gross	25 m
Length gross	25,000 mm
Width	75 mm
Height	75 mm
Thickness	0.3 mm
Net weight	0.95 kg

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-22-09-2026-INT-EN

MAGE Roof & Building Components GmbH
An den Steinenden 7 • 04916 Herzberg (Elster) • Tel.: +49 3535 4007-0 • Fax: +49 3535 4007-32
info@mage-roof.com • www.mage-roof.com