FireSafe W2 Black

Article number: 8032030010

MAGE
Damit Macher machen können.

Product overview

FireSafe W2 is a highly diffusion-open and non-combustible facade membrane that is also suitable for passive fire protection of rear-ventilated facades.

- Non-combustible (A2-s1,d0)
- UV-stable
- Highly diffusion-open sd value 0.10 m
- Easy to work with
- Tested sustainable product (EPD)

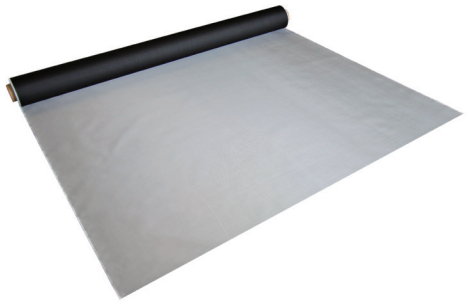

Technical specifications

Specifications	
Technical	
Colour	Black
Material	E-glass fibers
Adhesive tape included	☒
Grammature	230 g/m²
Number of layers	1
Performance	
Temperature resistance (min.)	-36 °C
Temperature resistance (max.)	100 °C
Nail tear strength diagonal	390 N
Nail tear strength length	290 N
Reinforcement	☒
SD value	0.1 M
Stretch length	6 %
Stretch after aging length	5 %
Stretch width	5 %
Stretch after aging width	4 %
Tensile strength diagonal	3100 N
Tensile strength length	4200 N
Tensile strength diagonal after aging	2600 N
Tensile strength length after aging	3800 N
UV resistance	☑

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-22-09-2026-INT-EN

MAGE Roof & Building Components GmbH
An den Steinenden 7 • 04916 Herzberg (Elster) • Tel.: +49 3535 4007-0 • Fax: +49 3535 4007-32
info@mage-roof.com • www.mage-roof.com

FireSafe W2 Black

Article number: 8032030010

MAGE
Damit Macher machen können.

Technical specifications (continuation)

Performance	
UV resistance period	NaN
Water tightness class	W2
Dimensions	
Length gross	50 m
Length gross	50,000 mm
Width	1.5 m
Width	1,500 mm
Height	150 mm
Thickness	0.23 mm
Net weight	19 kg
M2 per roll	75

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-22-09-2026-INT-EN

MAGE Roof & Building Components GmbH
An den Steinenden 7 • 04916 Herzberg (Elster) • Tel.: +49 3535 4007-0 • Fax: +49 3535 4007-32
info@mage-roof.com • www.mage-roof.com